


SECTION A - A

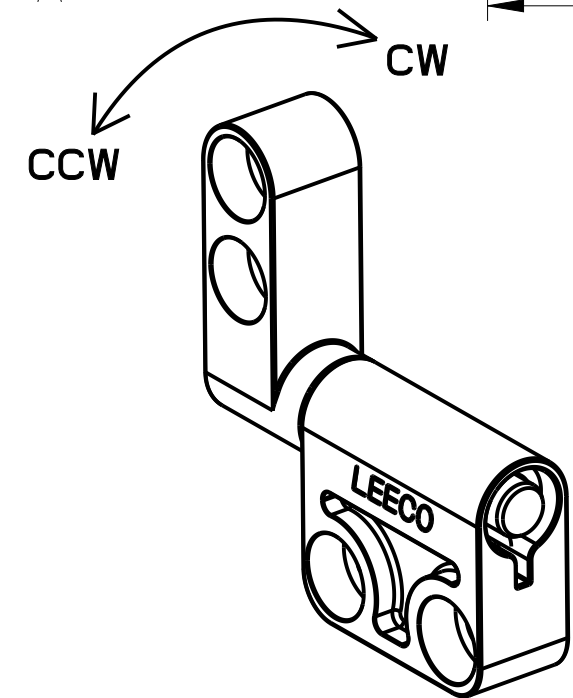

NOTES:

1. TORQUE RATINGS, Nm :

PART NUMBER	SYMMETRIC TORQUE
CT10C-1025-09	0.9
CT10C-1025-14	1.4
CT10C-1025-18	1.8
CT10C-1025-23	2.3
CT10C-1025-27	2.7

PART NUMBER	ASYMMETRIC CW TORQUE	ASYMMETRIC CCW TORQUE
CT10C-2025-14	1.4	0.8
CT10C-2025-18	1.8	1.1
CT10C-2025-23	2.3	1.4
CT10C-2025-27	2.7	1.6
CT10C-2025-34	3.4	2.0
CT10C-3025-14	0.8	1.4
CT10C-3025-18	1.1	1.8
CT10C-3025-23	1.4	2.3
CT10C-3025-27	1.6	2.7
CT10C-3025-34	2.0	3.4

2. CYCLE LIFE:
WITHIN 25,000 CYCLES STATIC TORQUE STAY WITHIN ±20% OF TORQUE SPECIFICATION.

3. FINISH: NATURE

4. 360 DEGREE SHAFT ROTATION

METRIC(MM) 0-3 < ±0.15 3-10 < ±0.20 10-30 < ±0.25 30-50 < ±0.30 50-100 < ±0.40 100-200 < ±0.50	[ENGLISH] (IN) 0-0.118 < ±0.006 0.118-0.394 < ±0.008 0.394-1.181 < ±0.010 1.181-2.000 < ±0.012 2.000-4.000 < ±0.016 4.000-8.000 < ±0.020	<h1 style="text-align: center;">LEEEO</h1>		DWG NO. CT10C-x025-xx	
				TITLE CT10C	
APPROVED JLIU		DRAWN BCHEN		MATERIAL STEEL & ZINC	
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEEEO TECHNOLOGIES CORPORATION		SHEET 1 OF 1		SCALE: 2.000	
				REV	A3

