


SECTION A - A

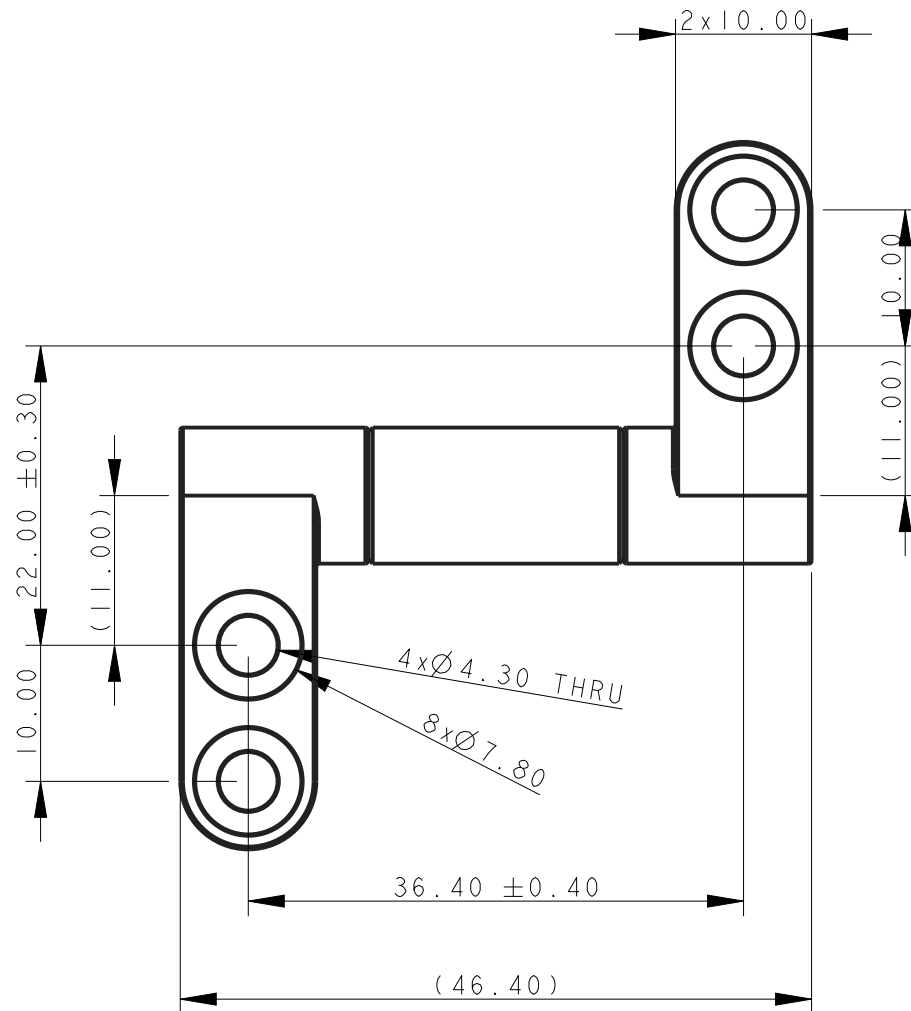

NOTES:

1. TORQUE RATINGS, Nm :

PART NUMBER	SYMMETRIC TORQUE
SH10S-1046-10	1.0
SH10S-1046-20	2.0
SH10S-1046-30	3.0

2. CYCLE LIFE:
WITHIN 25,000 CYCLES STATIC TORQUE STAY WITHIN
±25% OF TORQUE SPECIFICATION.

3. FINISH: PLATING AND NATURE

4. 360 DEGREE SHAFT ROTATION

5. U.S. PAT. NO. 9,609,770

METRIC(MM)	[ENGLISH] (IN)	LEEEO		DWG NO.	
0-3 < ±0.15	0-0.118 < ±0.006			SH10S-1046-xx	
3-10 < ±0.20	0.118-0.394 < ±0.008	TITLE		SH10S	
10-30 < ±0.25	0.394-1.181 < ±0.010			MATERIAL	
30-50 < ±0.30	1.181-2.000 < ±0.012	APPROVED	DRAWN	REV	
50-100 < ±0.40	2.000-4.000 < ±0.016	JLIU	BCHEN		
100-200 < ±0.50	4.000-8.000 < ±0.020	SHEET 1 OF 1		SCALE: 1.800	
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEEEO TECHNOLOGIES CORPORATION					